9.3 CONTROL PANEL SECTION

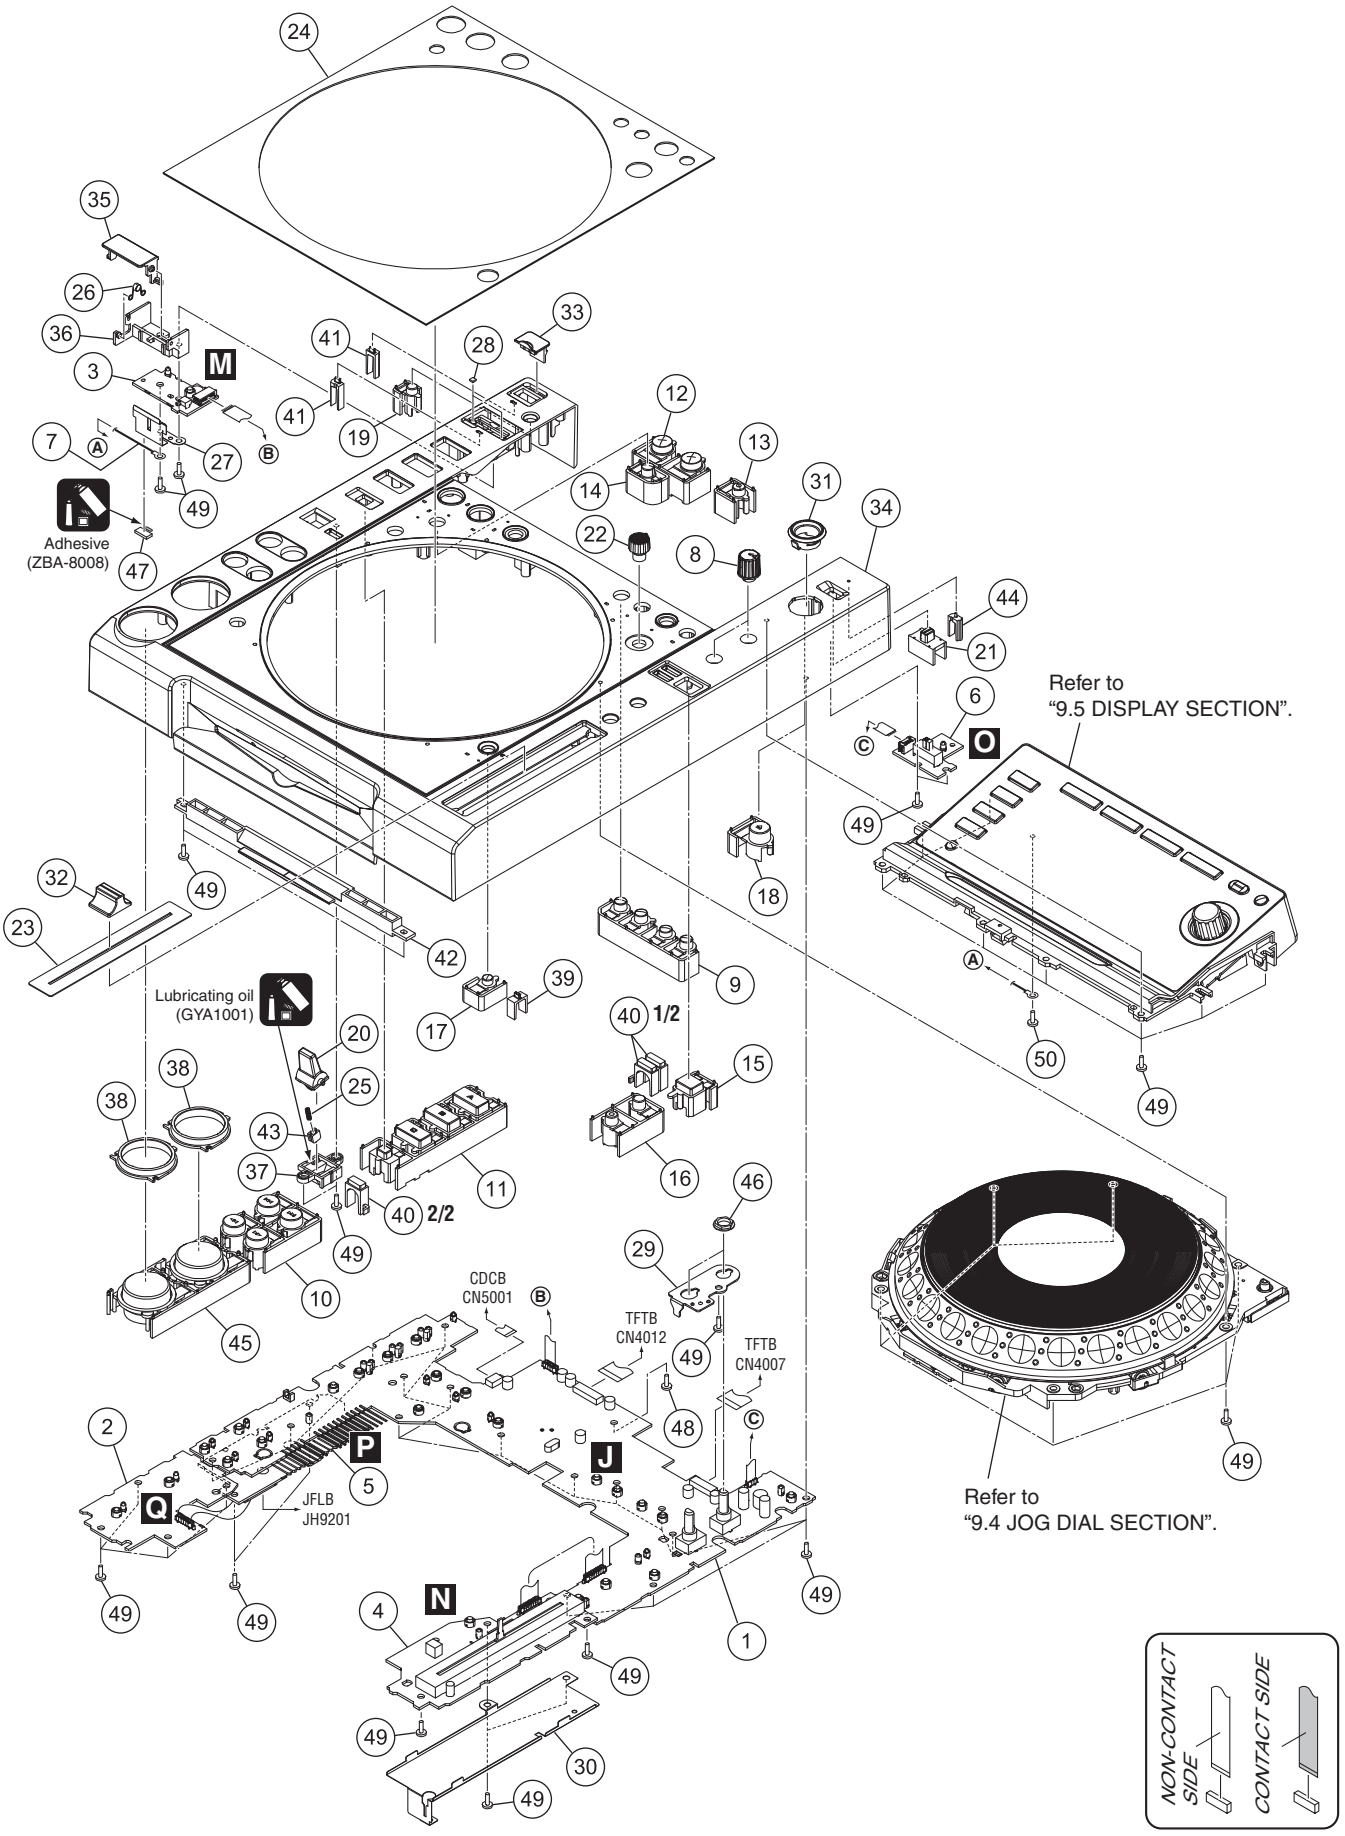

CONTROL PANEL SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	PNLB Assy	DWG1665
	2	KSWB Assy	DWS1409
	3	SDSW Assy	DWS1420
	4	SLDB Assy	DWX2983
	5	CNCT Assy	DWX3009
	6	EUPB Assy	DWX3042
	7	Earth Lead Unit / 300V	DDF1032
	8	Rotary Knob C	DAA1194
	9	Button (CALL)	DAC2466
	10	Button (SERCH)	DAC2468
	11	Button (HOT CUE)	DAC2469
	12	Button (LOOP)	DAC2470
	13	Button (RELOOP)	DAC2471
	14	Button (4-BEAT LOOP)	DAC2472
	15	Button (JOG MODE)	DAC2473
	16	Button (TEMPO)	DAC2474
	17	Button (TEMPO REST)	DAC2475
	18	Button (EJECT)	DAC2476
	19	Button (USB STOP)	DAC2477
	20	Lever	DAC2478
	21	Slide SW Knob	DAC2479
	22	Adjust Knob Black	DAC2528
	23	Slide Sheet 1C	DAH2404
	24	Top Panel	DAH2703
	25	Lever Spring	DBH1702
	26	Spring	DBH1717
	27	Card Spring	DBK1340
	28	Door Cushion	DEB1780
	29	VR Stay	DNF1663
	30	Earth Plate	DNH2849
	31	Eject Guard	DNK3958
	32	Slide Knob	DNK4498
	33	USB Cover	DNK4999
	34	Control Panel	DNK5306
	35	SD Card Door	DNK5308
	36	SD Door Holder	DNK5309
	37	Lever Plate	DNK5312
	38	Ring Lens (PLAY)	DNK5315
	39	TEMPO Lens	DNK5316
	40	MODE Lens	DNK5317
	41	DEVICE Lens	DNK5318
	42	Front Lens	DNK5328
	43	Lever Cap	DNK5344
	44	EUP Lens	DNK5408
	45	PLAY Button Assy	DXB2069
	46	Flange Nut M9	DBN1008
	47	Gasket (7 x 15 x 1)	DEC3259
	48	Screw	BBZ30P060FTB
	49	Screw	BPZ30P080FNI
	50	Screw	BBZ26P060FTB

2. CONTRAST OF MISCELLANEOUS PARTS

NOTES:
- *Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.*
- *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
- *Screws adjacent to ▼ mark on product are used for disassembly.*
- *For the applying amount of lubricants or glue, follow the instructions in this manual. (In the case of no amount instructions, apply as you think it appropriate.)*
- *Nos. indicate the pages and Nos. in the service manual for the base model.*
- *When ordering resistors, first convert resistance values into code form as shown in the following examples.*

Ex.1 When there are 2 effective digits (any digit apart from 0), such as 560 ohm and 47k ohm (tolerance is shown by J=5%, and K=10%).

560Ω → 56 x 10^1 → 561 ····· RD1/4PU561J
47kΩ → 47 x 10^3 → 473 ····· RD1/4PU473J
0.5Ω → R50 ····· RN2HR50K
1Ω → 1R0 ····· RS1P1R0K

Ex.2 When there are 3 effective digits (such as in high precision metal film resistors).

5.62kΩ → 562 x 10^1 → 5621 ····· RN1/4PC5621F

2.1 CONTRAST TABLE

(1) CDJ-2000 and CDJ-2000/2 are constructed the same except for the following:

Mark	No.	Symbol and Description	CDJ-2000 /CUXJ,/SYXJ8,/FLXJ,/KXJ,/AXJ5	CDJ-2000 /UXJCB2,/SYXJ82,/FLXJ2,/KXJ2,/AXJ52	Remarks
		PCB ASSEMBLIES			
NSP		1..TFTA Assy	DWM2355	DWM2445	
	P77-2	2..SDCB Assy	DWX2980	DWX3293	*2
	P83-1	2..TFTB Assy	DWX2882	DWX3291	*1
	P83-2	2..CDCB Assy	DWX2987	DWX3292	*1
		DISPLAY SECTION			
	P83-3	LCD	DWX3126	CWX3970	
	P83-17	LCD Packing (Top)	DEC3193	DEC3376	
	P83-18	LCD Stay	DND1263	DND1267	
	P83-19	Rear Bracket	DND1264	DND1268	
	P83-20	LCD Holder	DNH2850	Not used	
	P83-21	LCD Panel	DNK5319	DNK5951	
	P83-30	Screw	BBZ30P060FTB(x 22)	BBZ30P060FTB(x 21)	
	P83-31	Screw	BSZ20P040FTB	Not used	
		Screw	Not used	BSZ30P040FTC	No. 1
		40P FFC	Not used	DDD1541	No. 2
		Fitting/LCD	Not used	DNH2992	No. 3

(2) CDJ-2000/CUXJ and CDJ-2000/UXJCB2 are constructed the same except for the following:

Mark	No.	Symbol and Description	CDJ-2000/CUXJ	CDJ-2000/UXJCB2	Remarks
		PACKING SECTION			
⚠	P75-1	Power Cable	ADG7021	ADG7022	
	P75-23	Packing Case	DHG2800	DHG3025	

(3) CDJ-2000/SYXJ8 and CDJ-2000/SYXJ82 are constructed the same except for the following:

Mark	No.	Symbol and Description	CDJ-2000/SYXJ8	CDJ-2000/SYXJ82	Remarks
		PACKING SECTION			
	P75-23	Packing Case	DHG2799	DHG3026	

(4) CDJ-2000/FLXJ and CDJ-2000/FLXJ2 are constructed the same except for the following:

Mark	No.	Symbol and Description	CDJ-2000/FLXJ	CDJ-2000/FLXJ2	Remarks
		PACKING SECTION			
	P75-23	Packing Case	DHG2801	DHG3028	

(5) CDJ-2000/KXJ5 and CDJ-2000/KXJ52 are constructed the same except for the following:

Mark	No.	Symbol and Description	CDJ-2000/KXJ	CDJ-2000/KXJ2	Remarks
		PACKING SECTION			
	P75-23	Packing Case	DHG2804	DHG3029	

(6) CDJ-2000/AXJ5 and CDJ-2000/AXJ52 are constructed the same except for the following:

Mark	No.	Symbol and Description	CDJ-2000/AXJ5	CDJ-2000/AXJ52	Remarks
		PACKING SECTION			
	P75-23	Packing Case	DHG2803	DHG3030	

*1 Refer to “3.PCB PARTS LIST”, “5.SCHEMATIC DIAGRAM” and “6.PCB CONNECTION DIAGRAM”.

*2 Although DWX2980 and DWX3293 are different in part number, they are constructed same. Refer to “CDJ-2000/CUXJ(RRV3999)”.

Changing the constants for the parts of the MAIN and JACB Assys

With a modification of the LCD section, the constants for the parts of the MAIN and JACB Assy, have been changed for improvement of the sound quality.

Mark	No.	Description	Part No.		
MAIN Assy : DWG1660					
RESISTORS					
R	570	RS1/16SS332J	=>	RS1/16SS222J	
R	571	RS1/16SS332J	=>	RS1/16SS222J	
R	572	RS1/16SS332J	=>	RS1/16SS222J	
R	573	RS1/16SS332J	=>	RS1/16SS222J	
CAPACITORS					
C	3093	CEHVAW101M16	=>	CCH1565	
JACB Assy : DWX2988					
CAPACITORS					
C	9401	CEHAZL220M50	=>	CEHAZL101M25	
C	9404	CEHAZL220M50	=>	CEHAZL101M25	